


PROMAC™ 24 | MULTI-ARM CALIPER TOOL - HD - 1 11/16 IN.

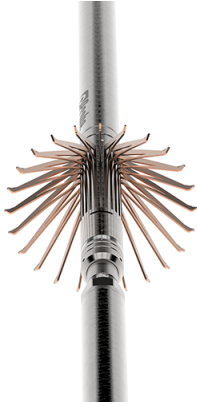

SKU: 050-MAC24-1100

Categories: [Caliper](#), [Cased Hole Wireline](#), [HD Platform™](#), [Multi-Arm Calipers](#), [ProMAC](#), [Well Integrity](#)

PRODUCT DESCRIPTION

The latest generation ProMAC™ series 24-arm caliper tool incorporates a series of mechanical, electrical and electronic design features that greatly increase tool accuracy, reliability, maintainability and overall cost efficiency.

Ratings & Dimensions

Max Temperature	350°F (177°C)
Max Pressure	15,000 psi (103.4 mPa)
Diameter	1.69 in (43.0 mm)
Length	61.2 in (1,554.5 mm)
Weight	25 lb (11.4 kg)
Tensile Strength	Connection: 15,000 lbf Body: 20,000 lbf
Measure Points	Caliper: 27.7 in (703.6 mm) from bottom of tool Inclination: 49.6 in (1,260 mm) from bottom of tool
Materials	Corrosion resistant materials used throughout

Hardware Characteristics

Sensor Type	Inclinometer: 3-axis accelerometer Caliper: Differential Variable Reluctance Transducer
Combinability	All HD tools: GR, CCL, iQ, RADii, RAS, PLT
Tool Positioning	Centralized
Acquisition Mode	SRO w/ TCU Mem w/ MLT

Electrical Specification

Voltage	SRO	50V DC
	Memory	19.2V DC
Current	SRO	40mA(log) 100mA(opening)
	Memory	104mA(log) 260mA(opening)

Version Control: 2021.11.11

On-line specifications are for REFERENCE ONLY and subject to change without notice. DO NOT USE FOR FIELD OPERATIONS.