


GAMMA GUN - GEIGER MULLER - SINGLE FIRE - 1 11/16 IN.

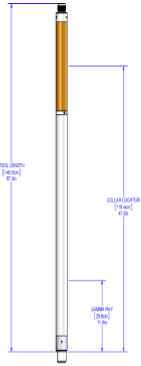

SKU: 050-GG170-0000

Categories: [Cased Hole Wireline](#), [Gamma Guns](#), [Perforating](#), [PTX](#), [Well Intervention](#)

PRODUCT DESCRIPTION

Ratings & Dimensions

| | |
|----------------------------|--|
| Max Temperature | 350°F (177°C) for 4 hours |
| Maximum Pressure | 20,000 psi (138 MPa) |
| Outer Diameter | 1.69 in (42.9 mm) |
| Length | 60.3 in (1531.62 mm) |
| Weight | 21.0 lb (9.5 kg) |
| Min Csg/Tbg OD | 2.38 in (60.5 mm) |
| Max Csg/Tbg OD | 7.0 in (178.0 mm) |
| Sensor Depth Offset | Gamma Ray: 12.5 in (317.5 mm) Casing Collar Locator: 53.9 in (1369.06 mm) |

Borehole Conditions

| | |
|-------------------------|--|
| Borehole Fluids | No Restrictions |
| Logging Speed | Maximum: About 30 ft (9 m) /min to 45 ft (9 to 14 m) /min |
| Tool Positioning | Centralized Eccentralized |

Measurements

| | | |
|--------------------------|--|--|
| Sensor Type | Gamma Ray Geiger-Muller detector | Casing Collar Locator Dual Magnet, Center Coil |
| Detection Type | Gamma Radiation | Magnetic |
| Principle | Naturally Occurring Gamma | Magnetic Flux Variation |
| Range | 0 to 5,000 cps | |
| Data Transmission | Analog, Pulse, + Polarity | Analog, Line Wobble, mV |

Calibration

Approx. 1.0 cps /GAPI unit

NA

Electrical Specifications**Cablehead Voltage**
Instrument Current
Shooting Polarity60 V Positive DC
60 mA
Negative

Version Control: 2022.02.17

On-line specifications are for REFERENCE ONLY and subject to change without notice. DO NOT USE FOR FIELD OPERATIONS.